


RoHS Compliant Product
A suffix of "C" specifies halogen free

FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any

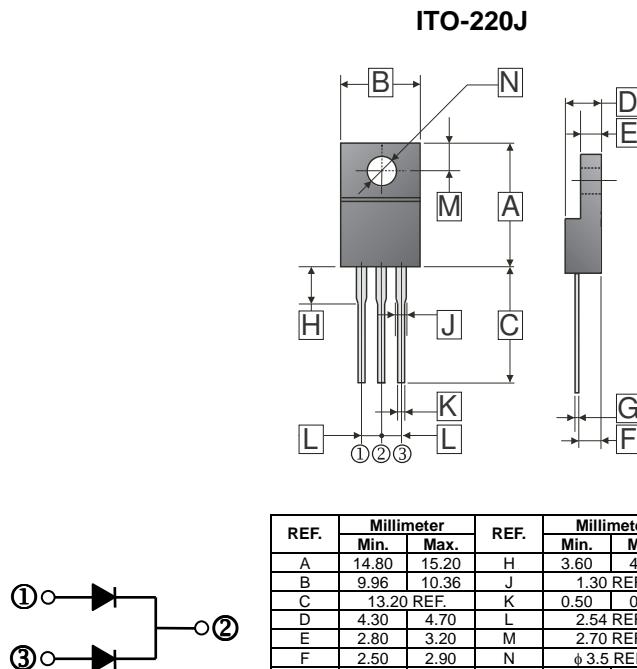

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	60	V
Working Peak Reverse Voltage	V_{RWM}	60	V
Maximum DC Blocking Voltage	V_{DC}	60	V
Maximum Average Forward Rectified Current	I_F	5	A
(Per Leg)		10	
(Per Device)			
Peak Forward Surge Current, 8.3 ms single half sine-wave Superimposed on rated load (JEDEC method)	I_{FSM}	150	A
Power dissipation	P_D	2	W
Typical Thermal Resistance	$R_{\theta JA}$	50	°C /W
Typical Thermal Resistance	$R_{\theta JC}$	4	°C /W
Operating and Storage Temperature Range	T_J, T_{STG}	150, -55~150	°C

ELECTRICAL CHARACTERISTICS


Parameter	Symbol	MIN.	Typ.	Max.	Unit	Test Condition
Reverse voltage	V_{BR}	60	-	-	V	
Maximum Instantaneous Forward Voltage	V_F	-	0.41	-	V	$I_F=2A$
		-	0.52	0.6		$I_F=5A$
Maximum DC Reverse Current at Rated DC Blocking Voltage ²	I_R	-	-	0.1	mA	$V_R=60V$
Typical Junction Capacitance ¹	C_J	-	650	-	pF	

NOTES:


1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Pulse Test : Pulse Width = 300 µs, Duty Cycle \leq 2.0%.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

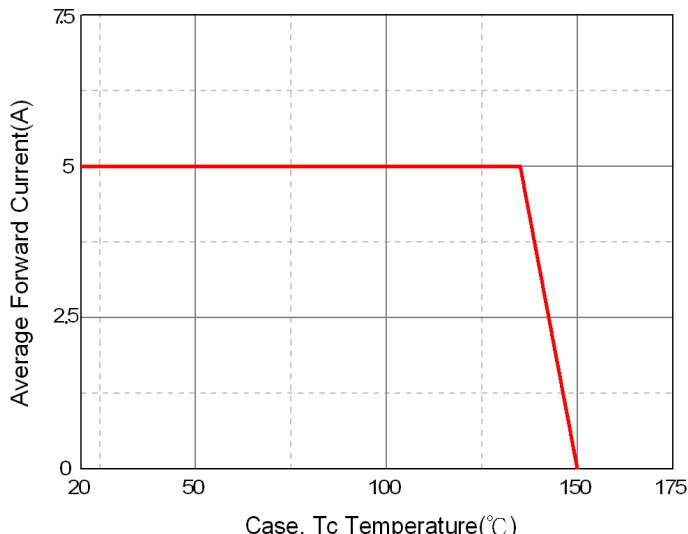


Maximum Non-Repetitive Forward Surge Current

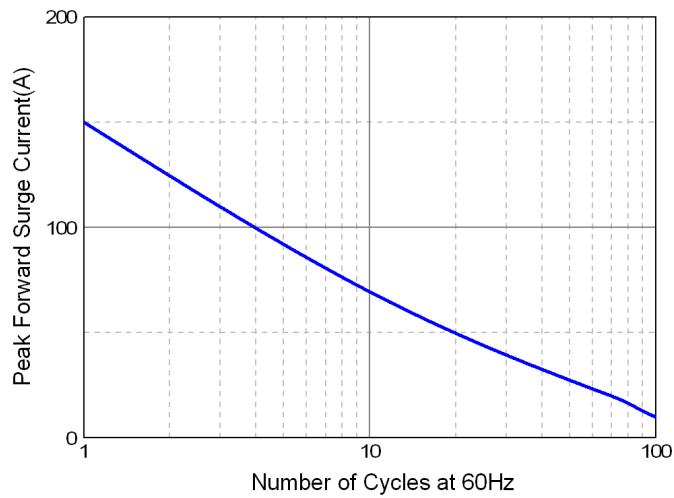

Typical Junction Capacitance

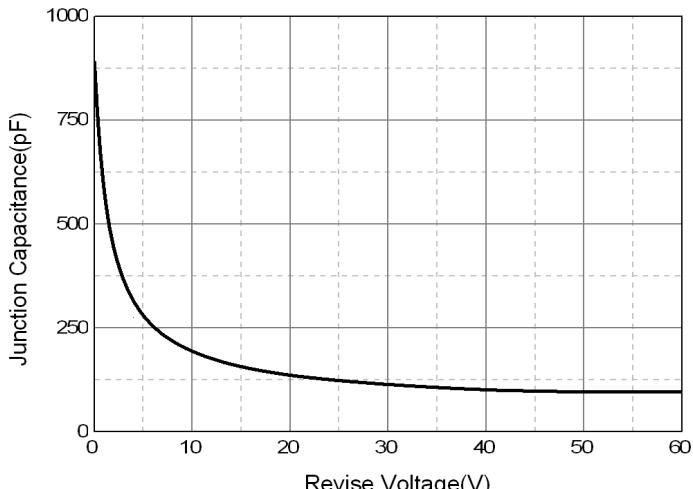

Typical Forward Characteristic

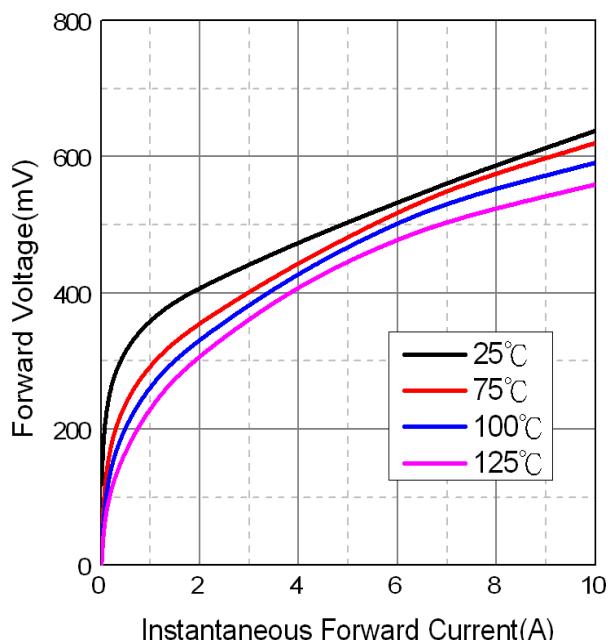

Typical Reverse Characteristic

