

RoHS Compliant Product  
A suffix of "C" specifies halogen free

## FEATURES

- Trench Barrier Schottky technology
- Low forward voltage drop, low power losses.
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

## MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed




## PACKAGE INFORMATION

Package	MPQ	Leader Size
TO-252	2.5K	13 inch

## ORDER INFORMATION

Part Number	Type
SBL20A100DS1	Lead (Pb)-free
SBL20A100DS1-C	Lead (Pb)-free and Halogen-free

**TO-252**

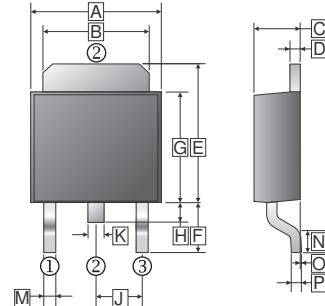

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.3	6.9	J	2.3	REF.
B	4.95	5.53	K	0.89	REF.
C	2.1	2.5	M	0.45	1.14
D	0.4	0.9	N	1.55	Typ.
E	6	7.7	O	0	0.15
F	2.90	REF.	P	0.58	REF.
G	5.4	6.4			
H	0.6	1.2			

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	100	V
Working Peak Reverse Voltage	$V_{RSM}$	100	V
Maximum DC Blocking Voltage	$V_{DC}$	100	V
Maximum Average Forward Rectified Current	$I_F$	20	A
Peak Forward Surge Current, 8.3 ms single half sine-wave Superimposed on rated load (JEDEC method)	$I_{FSM}$	200	A
Voltage Rate of Change (Rated $V_R$ )	$dv/dt$	10000	V / $\mu$ s
Typical Thermal Resistance <sup>1</sup>	$R_{\theta JC}$	6	$^{\circ}\text{C}/\text{W}$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-40~150	$^{\circ}\text{C}$

## ELECTRICAL CHARACTERISTICS


Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	$V_F$	0.45	-	V	$I_F=3\text{A}, T_J=25^{\circ}\text{C}$
		0.5	-		$I_F=5\text{A}, T_J=25^{\circ}\text{C}$
		0.61	-		$I_F=10\text{A}, T_J=25^{\circ}\text{C}$
		0.8	0.84		$I_F=20\text{A}, T_J=25^{\circ}\text{C}$
		0.72	-		$I_F=20\text{A}, T_J=125^{\circ}\text{C}$
Maximum DC Reverse Current at Rated DC Blocking Voltage <sup>3</sup>	$I_R$	-	0.15	mA	$T_J=25^{\circ}\text{C}$
		-	10		$T_J=100^{\circ}\text{C}$
Typical Junction Capacitance <sup>2</sup>	$C_J$	630	-	pF	

Notes:


1. Surface mounted on 2.5cm x 2.5cm x 0.5mm copper pad area.
2. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
3. Pulse Test: Pulse Width = 300  $\mu$ s, Duty Cycle  $\leq 2.0\%$ .

## RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

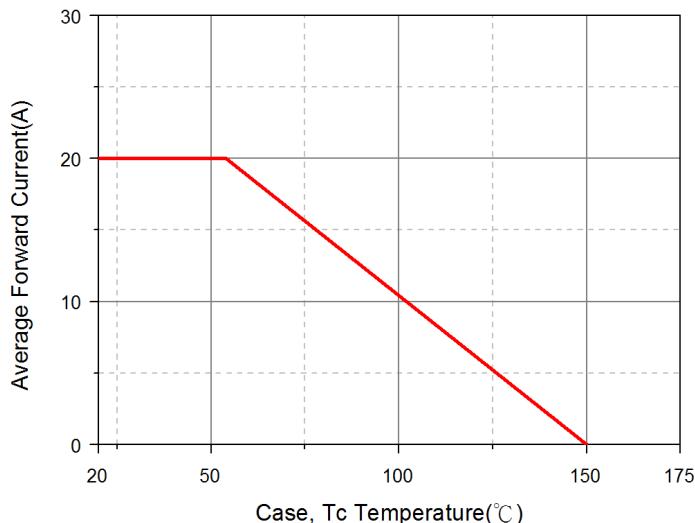


Typical Junction Capacitance

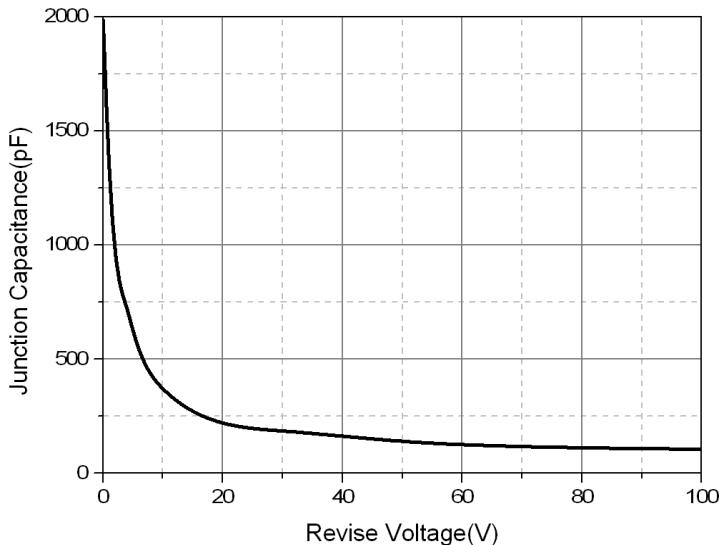

Maximum Non-Repetitive Forward Surge Current

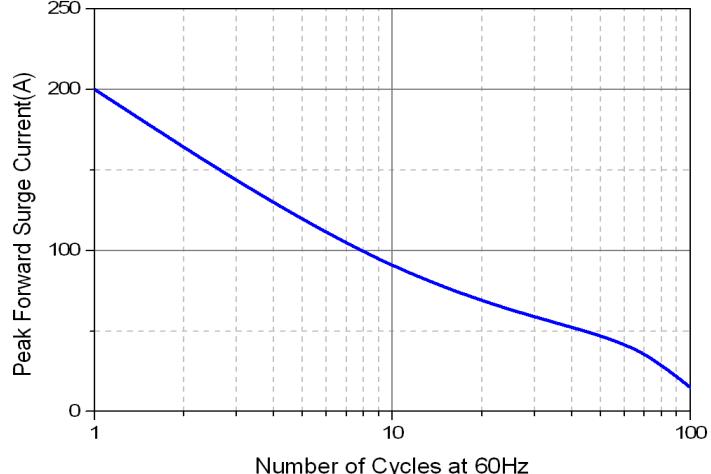

Typical Forward Characteristic

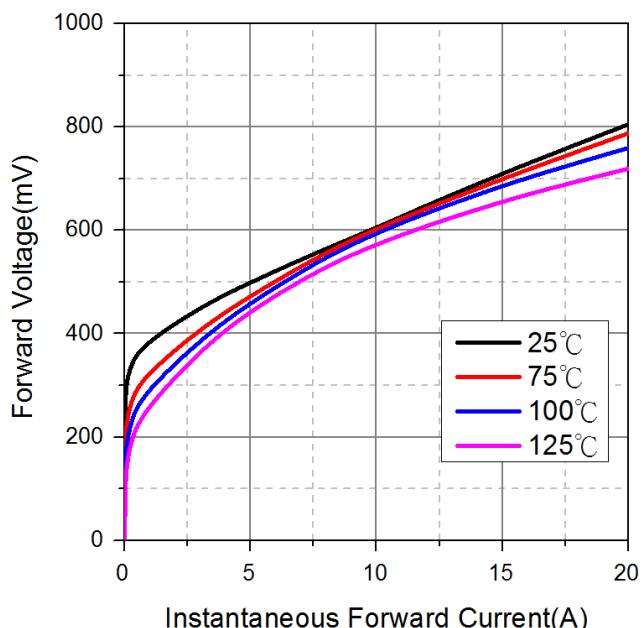

Typical Reverse Characteristic

