

RoHS Compliant Product  
A suffix of "-C" specifies halogen free

## FEATURES

- Low Forward Voltage and Low Reverse Current
- High Thermal Reliability
- Patented Super Barrier Rectifier Technology
- High Forward Surge Capability
- Ultra Low Power Loss and High Efficiency
- Plastic Material-UL Flammability 94V-0


## PACKAGE INFORMATION

Package	MPQ	Leader Size
TO-277D	5K	13 inch


## PACKAGE INFORMATION

Part Number	Type
SMPH10200L-C	Lead (Pb)-free and Halogen-free


### Mounting Pad Layout



\*Dimensions in millimeters

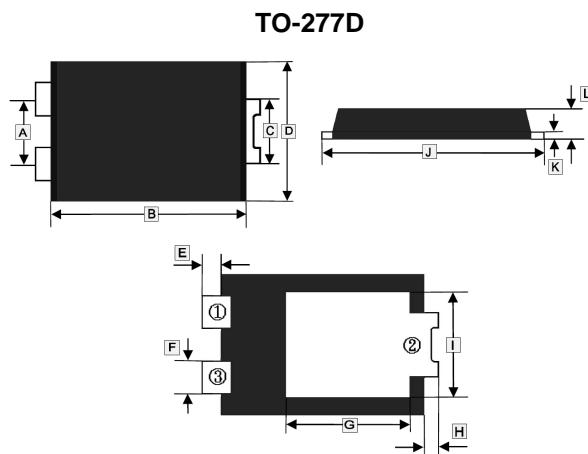

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.00	2.20	G	4.05 TYP.	
B	5.90	6.30	H	1.125 TYP.	
C	1.85	2.25	I	3.55	3.95
D	4.10	4.50	J	6.30	6.70
E	0.206 TYP.		K	0.15	0.35
F	1.00	1.40	L	1.00	1.40



## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating		Unit
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	200		V
Working Peak Reverse Voltage	V <sub>RSM</sub>	200		V
Maximum DC Blocking Voltage	V <sub>DC</sub>	200		V
Maximum Average Forward Rectified Current	I <sub>F</sub>	10		A
Peak Forward Surge Current @8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150		A
Typical Thermal Resistance from Junction-Ambient	R <sub>θJA</sub>	110		°C/W
Typical Thermal Resistance from Junction-Lead	R <sub>θJL</sub>	3.5		
Operating & Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-40~150		°C

## ELECTRICAL CHARACTERISTICS


Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	V <sub>F</sub>	0.72	0.78	V	I <sub>F</sub> =3A, T <sub>J</sub> =25°C
		0.82	0.87		I <sub>F</sub> =10A, T <sub>J</sub> =25°C
		0.69	-		I <sub>F</sub> =10A, T <sub>J</sub> =125°C
Maximum DC Reverse Current <sup>1</sup> @Rated DC Blocking Voltage	I <sub>R</sub>	0.05	10	uA	T <sub>J</sub> =25°C
		0.02	2	mA	T <sub>J</sub> =100°C
Typical Junction Capacitance <sup>2</sup>	C <sub>J</sub>	390	-	pF	

Notes:


1. Pulse Test: Pulse width=300μs, duty cycle≤2%.
2. Measured at 1MHz and applied reverse voltage of 5V D.C.

## RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

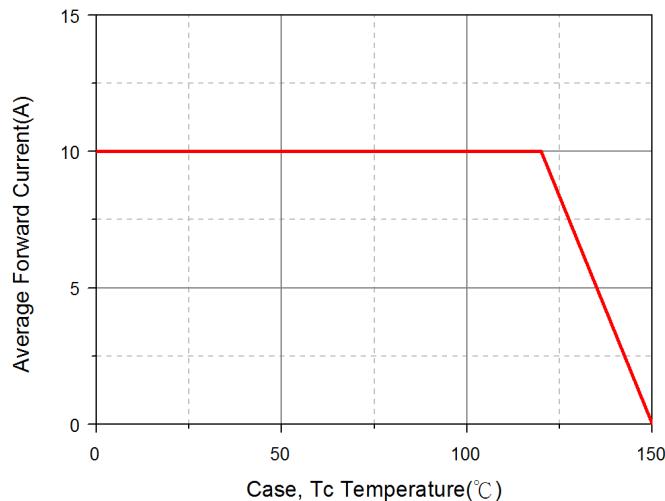


Typical Junction Capacitance

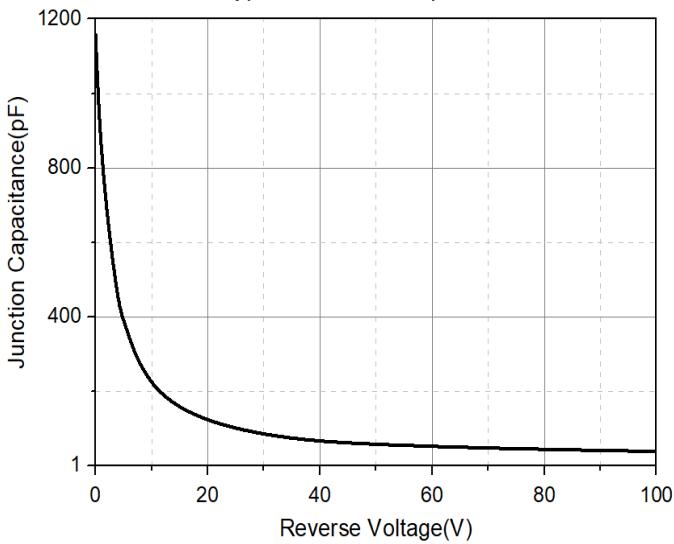

Maximum Non-Repetitive Forward Surge Current

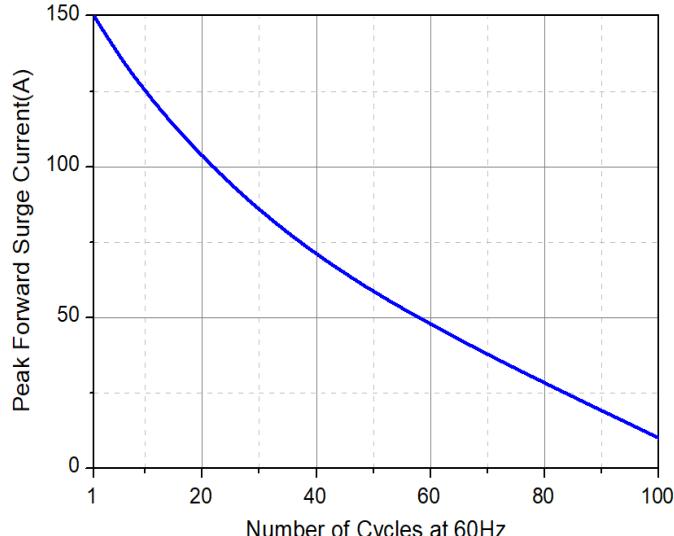

Typical Forward Characteristic

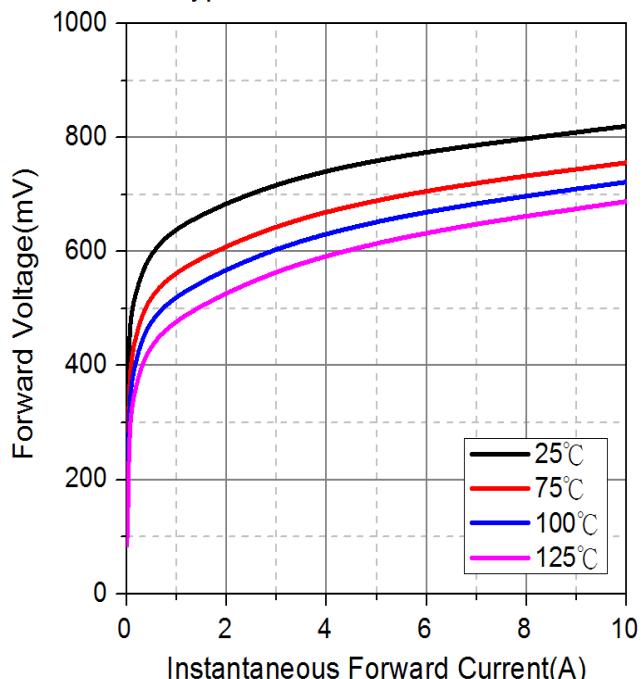

Typical Reverse Characteristic

