


RoHS Compliant Product  
A suffix of "C" specifies halogen free

## FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

## MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.98 grams (approximate)

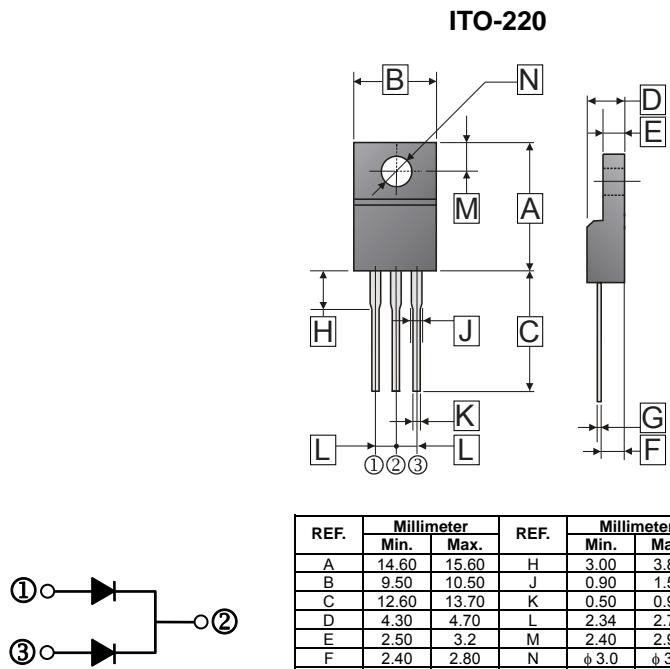

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, de-rate current by 20%.)


Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	150	V
Working Peak Reverse Voltage	$V_{RSM}$	150	V
Maximum DC Blocking Voltage	$V_{DC}$	150	V
Maximum Average Forward Rectified Current	$I_F$	5	A
		10	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	130	A
Maximum Instantaneous Forward Voltage	$V_F$	0.86	V
		0.75	
Maximum DC Reverse Current at Rated DC Blocking Voltage <sup>3</sup>	$I_R$	0.03	mA
		8	
Typical Junction Capacitance <sup>1</sup>	$C_J$	350	pF
Typical Thermal Resistance <sup>2</sup>	$R_{\theta JC}$	4	°C / W
Voltage Rate Of Change (Rated $V_R$ )	$dv / dt$	10000	V / µs
Operating Temperature Range $T_J$	$T_J$	-50~150	°C
Storage Temperature Range $T_{STG}$	$T_{STG}$	-65~175	°C

Notes:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.
3. Pulse test: 300µS pulse width, 1% duty cycle.

## RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

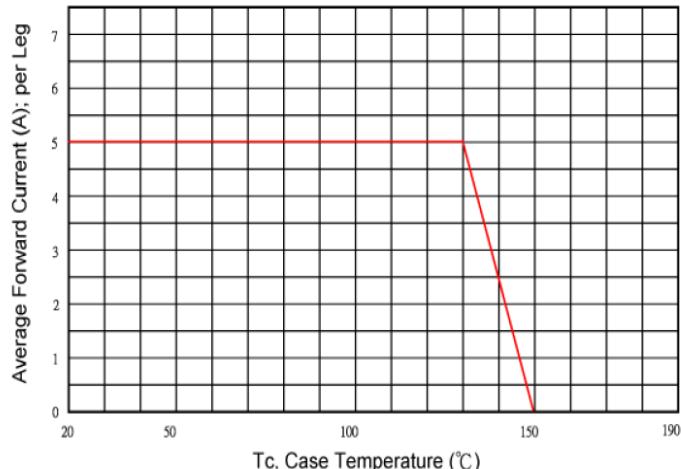


Typical Junction Capacitance

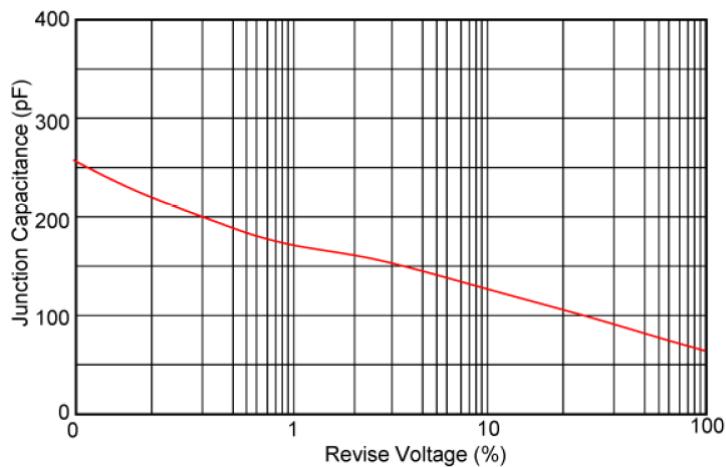

Maximum Non-Repetitive Forward Surge Current

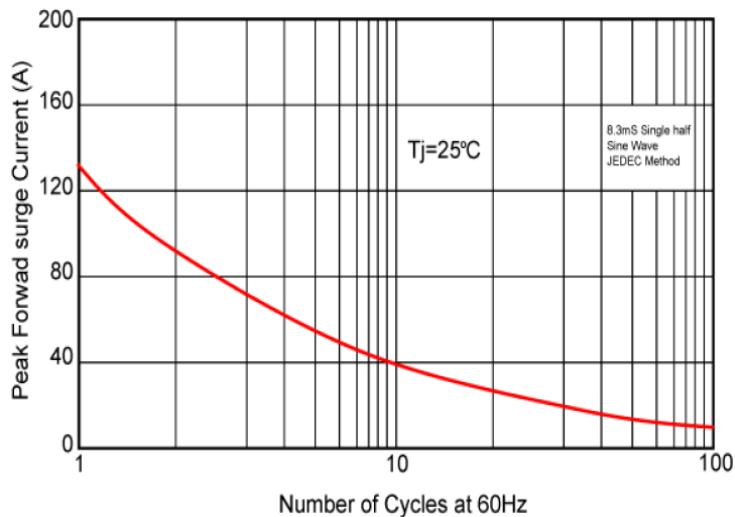

Typical Forward Characteristic

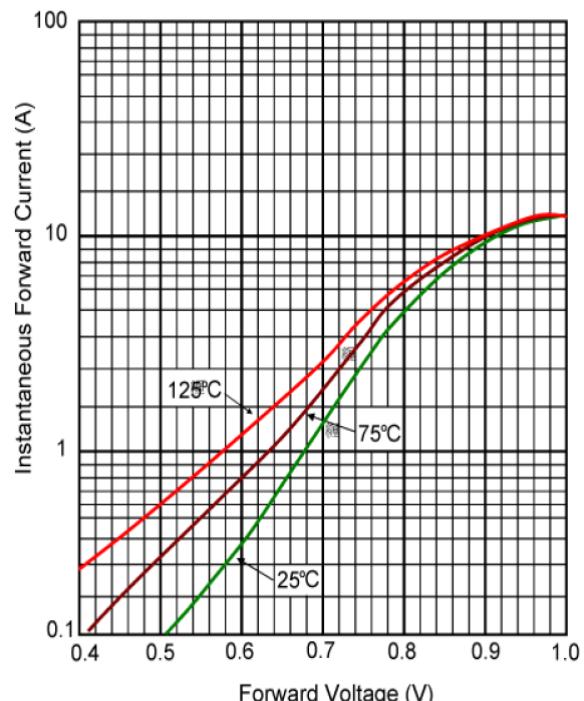

Typical Reverse Characteristic

