



RoHS Compliant Product  
A suffix of "-C" specifies halogen free

## FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

## MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any

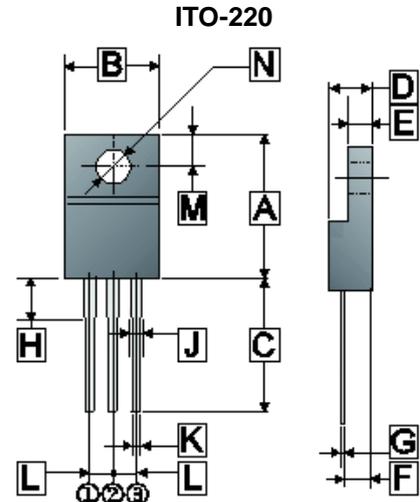

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	14.50	16.50	H	2.70	4.35
B	9.50	10.72	J	0.90	1.70
C	12.60	14.22	K	0.30	0.95
D	4.20	5.10	L	2.34	2.75
E	2.30	3.30	M	2.40	3.60
F	2.30	3.10	N	φ 3.0	φ 3.8
G	0.30	0.75			

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, de-rate current by 20%.)


Parameter		Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage		$V_{RRM}$	60	V
Working Peak Reverse Voltage		$V_{RSM}$	60	V
Maximum DC Blocking Voltage		$V_{DC}$	60	V
Maximum Average Forward Rectified Current	Per Leg	$I_F$	5	A
	Per Device		10	
Peak Forward Surge Current@ 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)		$I_{FSM}$	130	A
Maximum Instantaneous Forward Voltage	$I_F=5A, T_A=25^\circ C, \text{ per leg}$	$V_F$	0.65	V
	$I_F=5A, T_A=125^\circ C, \text{ per leg}$		0.55	
Maximum DC Reverse Current at Rated DC Blocking Voltage <sup>2</sup>	$T_A = 25^\circ C$	$I_R$	0.2	mA
	$T_A = 125^\circ C$		10	
Typical Junction Capacitance <sup>1</sup>		$C_J$	350	pF
Typical Thermal Resistance from Junction to Case		$R_{\theta JC}$	4	°C / W
Voltage Rate Of Change (Rated $V_R$ )		$dv / dt$	10000	V / $\mu s$
Operating Junction and Storage Temperature Range		$T_J, T_{STG}$	150, -65~150	°C

Notes:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Pulse test: 300 $\mu s$  pulse width, 2% duty cycle.

**RATINGS AND CHARACTERISTIC CURVES**


Typical Forward Current Derating Curve

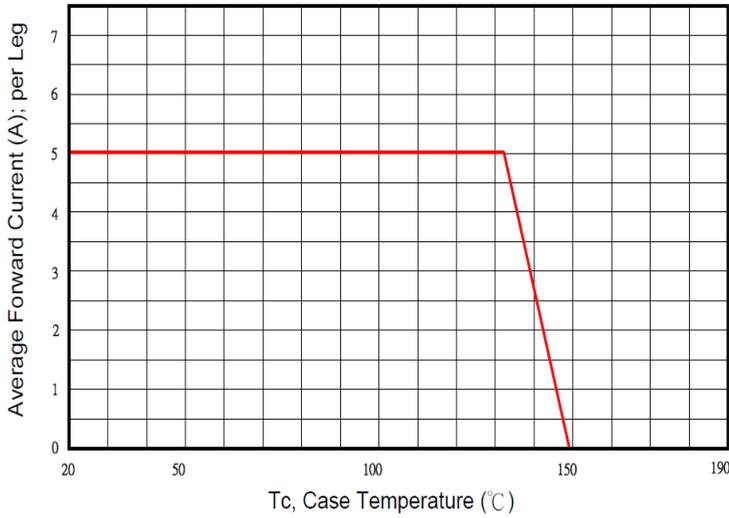


Typical Forward Characteristic

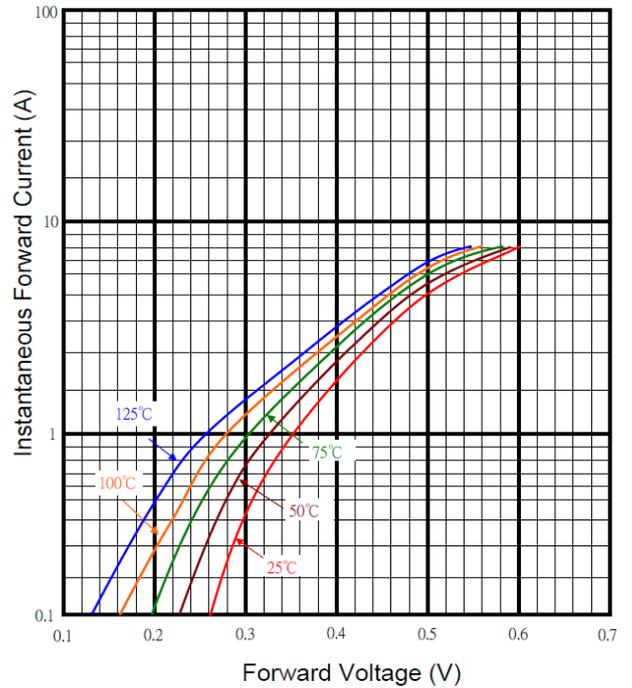

Maximum Non- Repetitive Forward Surge Current

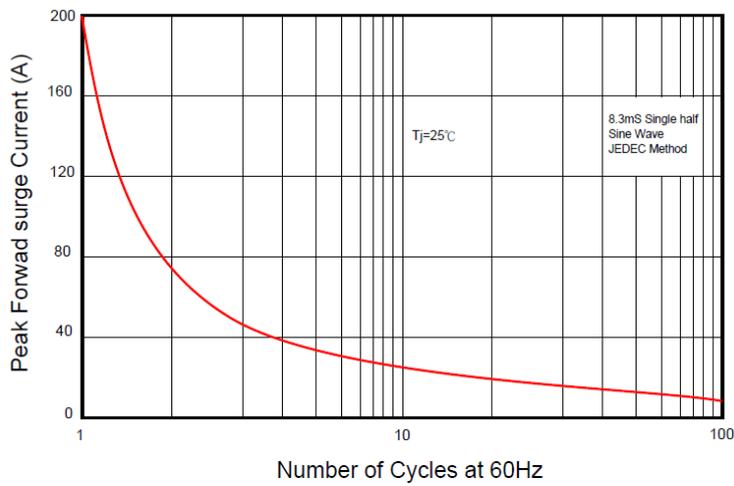

Typical Reverse Characteristic

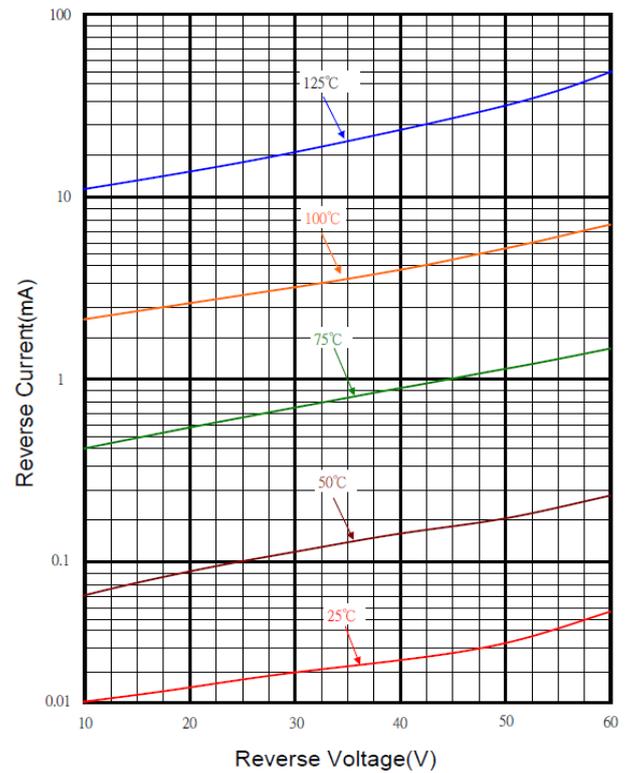

Typical Junction Capacitance

