

RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free


**FEATURES**

- Trench Barrier Schottky technology
- Low forward voltage drop, low power losses
- High Thermal Reliability
- High current capability
- High surge current capability
- Excellent High Temperature Stability
- Plastic Material-UL Flammability 94V-0


**PACKAGE INFORMATION**

Package	MPQ	Leader Size
TO-277D	5K	13 inch

**TO-277D**

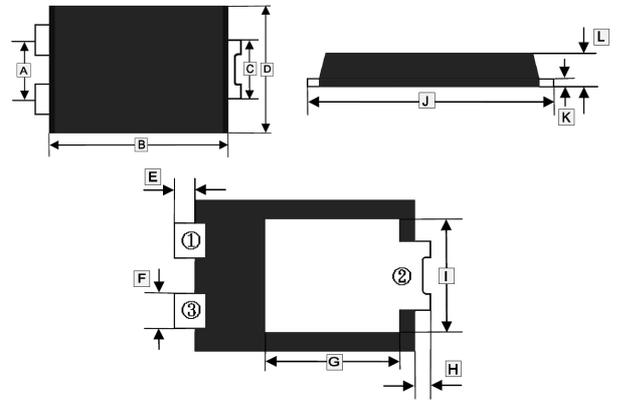

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.65	1.95	G	3.25	3.85
B	5.3	5.5	H	0.45	0.65
C	1.7	1.9	I	2.9	3.2
D	3.8	4.2	J	6.4	6.6
E	0.45	0.65	K	0.3	0.45
F	0.8	1.0	L	1.0	1.2



**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

(T<sub>A</sub>=25°C, unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating	Unit
Maximum Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	150	V
Maximum Working Peak Reverse Voltage	V <sub>RWM</sub>	150	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	150	V
Maximum Average Rectified Output Current	I <sub>F</sub>	10	A
Non-Repetitive Peak Forward Surge Current@ 8.3ms Single Half Sine-Wave	I <sub>FSM</sub>	150	A
Voltage Rate of Change (Rated V <sub>R</sub> )	dv/dt	10000	V / μs
Typical Thermal Resistance from Junction to Ambient	R <sub>θJA</sub>	110	°C / W
Typical Thermal Resistance from Junction to Lead	R <sub>θJL</sub>	3.5	°C / W
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	150, -55~150	°C

**ELECTRICAL CHARACTERISTICS**


Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Forward Voltage	V <sub>F</sub>	0.69	0.73	V	I <sub>F</sub> =3A, T <sub>J</sub> =25°C
		0.75	0.80	V	I <sub>F</sub> =5A, T <sub>J</sub> =25°C
		0.85	0.95	V	I <sub>F</sub> =10A, T <sub>J</sub> =25°C
		0.7	-	V	I <sub>F</sub> =10A, T <sub>J</sub> =125°C
Maximum DC Reverse Current at Rated DC Blocking Voltage <sup>2</sup>	I <sub>R</sub>	-	0.1	mA	T <sub>J</sub> =25°C
		-	10		T <sub>J</sub> =100°C
Typical Junction Capacitance <sup>1</sup>	C <sub>J</sub>	240	-	pF	

Notes:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Pulse Test : Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

**CHARACTERISTIC CURVES**


Typical Forward Current Derating Curve

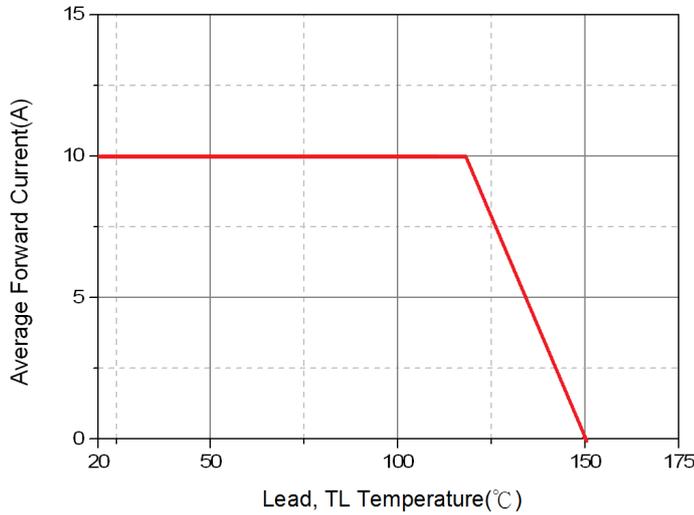


Typical Forward Characteristic

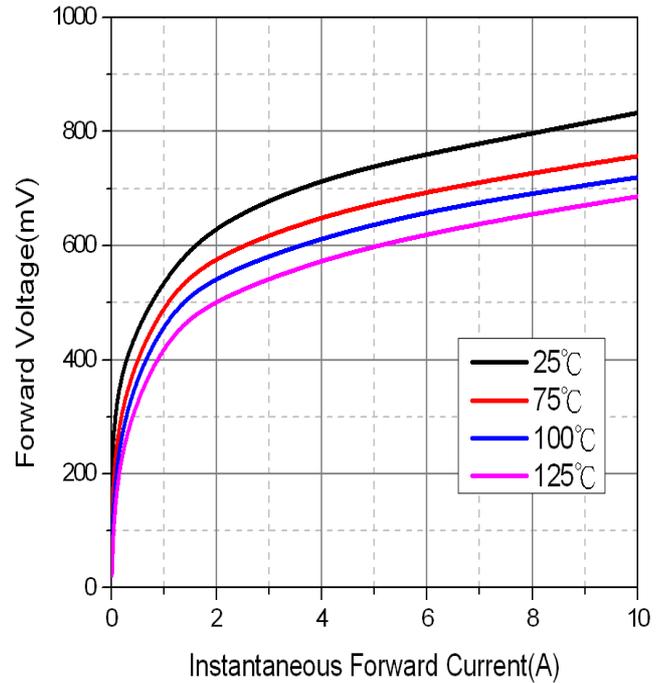

Typical Junction Capacitance

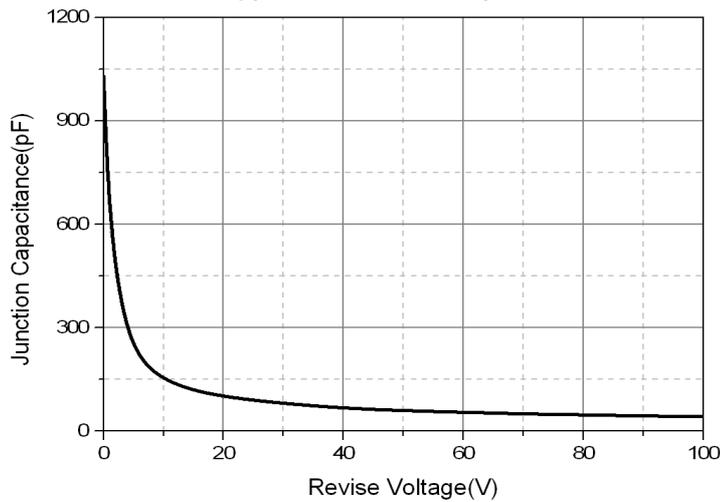

Typical Reverse Characteristic

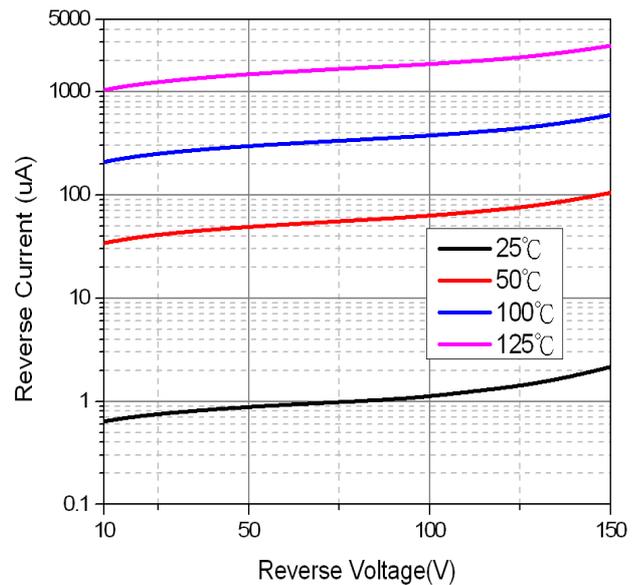

Maximum Non-Repetitive Forward Surge Current

